


Evoke 150C Full color

Compact Eight-Color Powerhouse

1. Equipped with Nebula C8 Color Light Engine
2. Industry's widest CCT range of 1,000K–20,000K
with ± 200 green/magenta adjustment
3. Superior illuminance 22,230 lux@1m (5600K, with 45° reflector)
4. Excellent color rendition with CRI average 98, TLCI average 98
5. Various lighting modes: CCT, HSI, RGBW, XY coordinates, gel, effect
6. All-in-one design weighs only 2.65kg/5.84 lb (with yoke)
7. Constructed with high-strength magnesium alloy and IP66-rated housing
8. Compatible with FE mount and FM mount accessory ecosystem

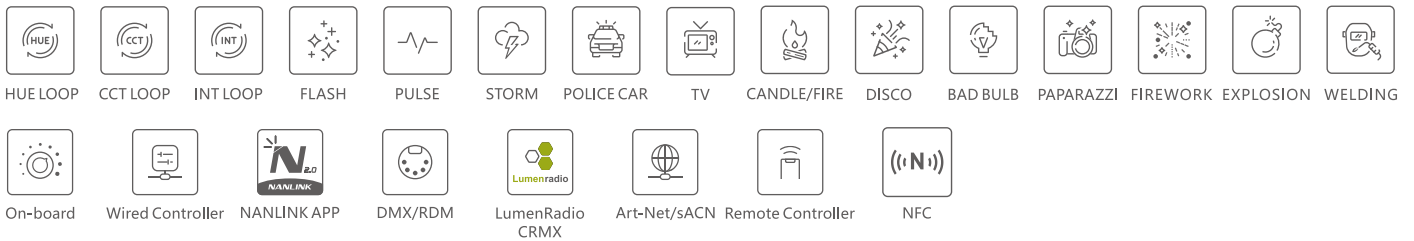

Includes

Evoke 150C × 1, Yoke × 1, RF-FE-45 FE Mount Reflector 45° × 1, AC Power Cable 4.5M × 1, 5/8" Baby Pin with Quick Release Plate × 1, D-Tap Cable × 1, USB Flash Drive × 1, AS-MB-1 Magnetic Base × 1, User Manual × 1, Carrying Bag × 1

Multiple Accessories, More Applications


FE Mount



FM Mount



Others

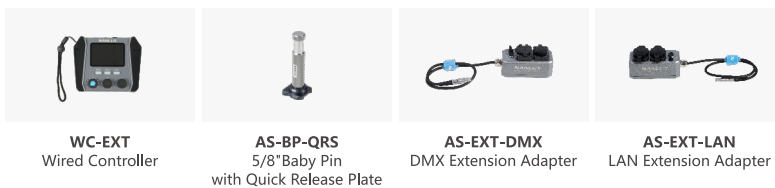

Evoked 150C Technical Data

Model	Evoked 150C
Rated Power	150W
Input Voltage/Current	AC100-240V/50-60Hz, 2A Max; DC14.4-28V; PD3.0 (12-28V) 60W Min
CCT	1000K-20000K (G/M±200)
CRI	Average 98
TLCI	Average 98
TM-30	Rf: Average 96 / Rg: Average 100
Dimming	0.0%-100.0%, by 0.1% increment
IP Rating	IP66
Control	On-board, Wired Controller, Nanlink App, Remote Controller, DMX/RDM*, LumenRadio CRMX, Art-Net/sACN*, NFC (*via the Extension Adapter)
Effects	CCT Loop, INT Loop, HUE Loop, Flash, Pulse, Storm, Police Car, TV, Paparazzi, Candle/Fire, Disco, Bad Bulb, Firework, Explosion and Welding
Product Size	Light Fixture: 209.14 × 146.95 × 127.29mm / 8.23 × 5.79 × 5.01" Yoke: 282.46 × 226.32 × 89.21mm / 11.12 × 8.91 × 3.51"
Product Weight	Light Fixture: 2.11kg / 4.65lb Yoke: 0.54kg / 1.19lb

Illumination (lux / fc)

	CCT	3200K	5600K	R	G	B
Light Only	1M	12120 lux / 1126 fc	12160 lux / 1130 fc	1705 lux / 158 fc	5680 lux / 528 fc	1600 lux / 149 fc
	2M	2921 lux / 271 fc	2940 lux / 273 fc	398 lux / 37 fc	1365 lux / 127 fc	386 lux / 36 fc
	3M	1320 lux / 123 fc	1328 lux / 123 fc	179 lux / 17 fc	615 lux / 57 fc	174 lux / 16 fc
With RF-FE-25 Reflector 25°	1M	85400 lux / 7934 fc	83500 lux / 7757 fc	10160 lux / 944 fc	38700 lux / 3595 fc	10920 lux / 1014 fc
	2M	14030 lux / 1303 fc	13730 lux / 1276 fc	1607 lux / 149 fc	6300 lux / 585 fc	1784 lux / 166 fc
	3M	5570 lux / 517 fc	5460 lux / 507 fc	645 lux / 60 fc	2520 lux / 234 fc	712 lux / 66 fc
With RF-FE-45 Reflector 45°	1M	22640 lux / 2103 fc	22230 lux / 2065 fc	2604 lux / 242 fc	10200 lux / 948 fc	2882 lux / 268 fc
	2M	5000 lux / 464 fc	4950 lux / 460 fc	548 lux / 51 fc	2256 lux / 210 fc	635 lux / 59 fc
	3M	2177 lux / 202 fc	2155 lux / 200 fc	238 lux / 22 fc	982 lux / 91 fc	276 lux / 26 fc

